

# ML-808GX

NEW

# Debut!

Flexibly usable for all kinds of  
dispensing scenes  
**Intelligent Dispenser**



PAT.

## Controller's performance enhanced

◆ Upgraded to Quadruple Accuracy of Response Time to Dispensing Signal

◆ I/O control **additional function**  
Controllable from PLC at will,  
RS-232C communication also available

## New Functions of software

◆ Conditioning mode for 2-part Adhesive **newly developed**

Automatically setup dispensing condition on the basis of test conditions

◆ Recipe management of dispensing conditions **new idea**

Dispensing conditions changing in accordance with time passage stored on an item by item basis



## Applications



Sealant dispensing of PUR for smartphone's cover



Dispensing of 2-part epoxy adhesive to motors





Line width variable in an instant

## Specifications

Item name	High precision dispenser flexible with viscosity change
Model	ML-808GX
Control system	Micro-computer controlled electro-pneumatic system
Pneumatic control circuit	Air pulse stable circuit (PAT.)
Pressure setting range	20 to 800kPa (in steps of 0.1kPa)
Dispensing duration range	0.01 to 999.9sec. (in steps of 0.001sec.)
Dispensing mode	Timed mode/manual mode
Vacuum pressure range	0 to -20kPa
Vacuum time range	0.001 to 4.000sec. (in steps of 0.001sec.)
Number of memory	400 channels
Main functions	Auto increment function Auto slope function Express shot function RS-232C communication function I/O communication function
Input/output signal	Input: Contact input or open collector input Output: Open collector output
Dispensing conditions edit software	MuCOM for ML-808GX (option)
Supply air pressure	Dispensing pressure + 100kPa or more, and max. 900kPa
Rated power source and frequency	100 to 240V AC, 50/60Hz
Input voltage and frequency /over-voltage category	90 to 264V AC, 47 to 63Hz Category II
Power consumption	40W
Applicable fuse	250V T2.0A (time-lag fuse ø5 type)
Operating environment	Temperature range: 15 to 35°C Humidity range: 25 to 75%, non-condensing Elevation: below 2000m
Dimensions	W255xD325xH102mm
Weight	5kg
Safety standard	Compliant with EU RoHS Compliant with CE mark (EMC LCD)

## Dimensions

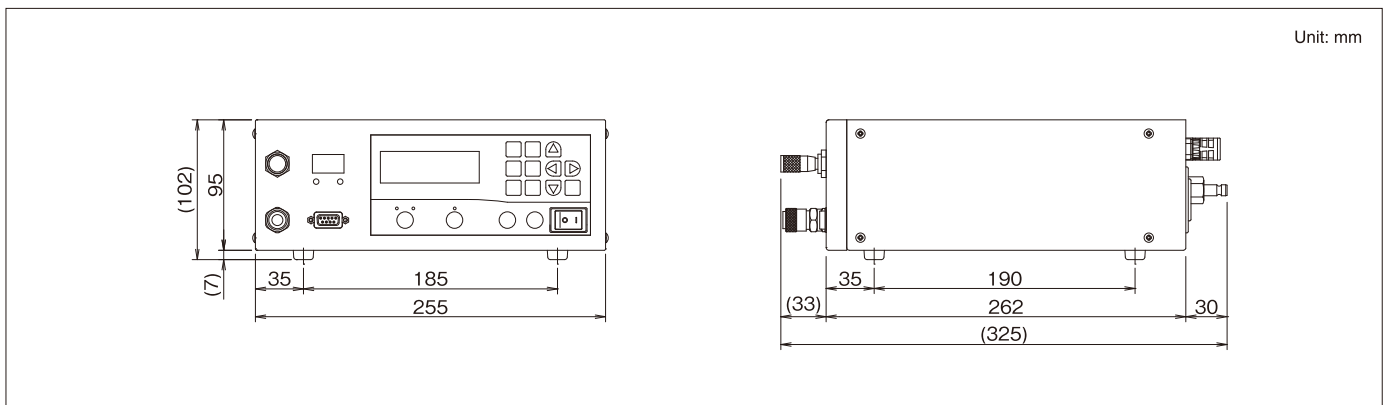

 **Safety precaution**  
Make sure to read the instruction manual before you use the unit, for your safety.

\* We reserve the right to change the specifications without notice.  
\* All copyrights are retained by MUSASHI ENGINEERING. Reprinting, reproducing, and/or transmitting as electronic data in whole or in part these material without prior written permission is strictly prohibited.

MUSASHI ENGINEERING, INC. is certified and registered according to ISO14001 ENVIRONMENTAL MANAGEMENT.



<http://www.musashi-engineering.co.jp/english/>

**World Leading Dispenser**  
**MUSASHI ENGINEERING, INC.**

**HEAD OFFICE**  
8-7-4, Shimorenjaku, Mitaka, Tokyo, 181-0013, Japan TEL : (81)422-76-7111 / FAX : (81)422-76-7122  
**BRANCH**  
TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

**SINGAPORE** 114 Lavender Street, #08-88/89 CT Hub 2, Singapore 338729  
TEL : (65)6258-2422 / FAX : (65)6258-4844

**THAILAND** No.12 Soi Bangna-Trad 25, Bangna, Bangkok 10260 Thailand  
TEL : (66)2-022-9015 / FAX : (66)2-769-5450

**INDONESIA** Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia  
TEL : (62)21-8990-5005 / FAX : (62)21-8990-5004

**GERMANY** Leopoldstrasse 244, 1.Stock 80807 Munich Germany  
TEL : (49)89-208039-470 / FAX : (49)89-208039-478

**KOREA** (902 No. 9 F. #C, Korea Bio Park.) 700, Daewangpangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea  
TEL : (82)31-702-3811 / FAX : (82)31-702-3881

**TAIWAN** 8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070  
TEL : (886)3-572-9200 / FAX : (886)3-572-9300

**CHINA**

**HONG KONG** Unit 1706, 17/F., Greenfield Tower, (South)Concordia Plaza, No.1 Science Museum Road, T.S.T.East, Kowloon, H.K.  
TEL : (852)2620-5799 / FAX : (852)2620-5771

**SHANGHAI** A-120 Room, No.525 Xian Feng Street (No.55 Jin Yu Road), Min Hang, Shanghai, China  
TEL : (86)21-6446-7881 / FAX : (86)21-6446-7882

**SHENZHEN** Room 702, West Tian'an Tech Plaza II, Tian'an Cyber Park, Futian District Shenzhen, China  
TEL : (86)755-8346-6822 / FAX : (86)755-8346-6866

**TIANJIN** Room 1206, Sino Ocean International Center, No. 40 Huachang Road, Hedong District, Tianjin  
TEL : (86)22-5856-2051

**SUZHOU** Room 1010, No.188 Wang Dun Road, GENWAY BUILDING, Suzhou City Industrial estate Distric, Jiangsu, CHINA  
TEL : (86)512-6878-4428 / FAX : (86)512-6878-4438